



Victory Two Series

2 HORSE SIDE-BY-SIDE

Available in bumper pull and gooseneck models

Standard Specifications

Running Gear

- 2 5/16" ball coupler
- (2) 3,500# Torsion ride axles, 102" wide
- Electric brakes on both axles
- (4) 16" Mini mod steel wheels with chrome center hub covers
- (4) 215/85R16 radial tires
- (1) Crank jack stand
- (2) Safety chains
- Electronic breakaway brake safety kit

Box Construction

- Tapered fuel saver V-nose
- 1-Piece aluminum roof with insulation & white aluminum interior liner
- Embossed aluminum floor & aluminum crossmembers
- 1/2" removable rubber floor mats in horse & tack floor
- Pre-painted white smooth exterior sheet sides & front end with polished stainless corners
- Aluminum fenders
- 48" high rubber liner in horse area
- Pre-painted white aluminum liner above rubber in horse area

Doors/Windows/Ramps/Stall Dividers

- Rear drop ramp with curtain doors, 24"x18" sliding window in each door, holdbacks on curtain doors
- (2) Side access doors with 24"x15" sliding windows, one each side to access horse compartment. Access door with 24"x15" sliding window into dressing room on curbside.
- 48"x24" window on each side of horse compartment
- (1) Swinging 18"x80" stall divider with pads. Divider is hinged off front removable aluminum post
- (2) Aluminum padded breast bars
- (2) Aluminum padded tail bars

Dressing Room


- (1) Removable spring-loaded saddle post with (2) saddle racks
- (1) Brush tray
- (1) Blanket bar
- (8) Bridle hooks

Lights

- (3) Interior sealed beam lights, (2) in horse area, (1) in tack room (2 in gooseneck tack room)
- (1) LED marker light on bottom rear corner of each side
- LED marker lights on top of fenders
- LED marker light bar on top rear header
- (4) LED stop/tail/turn lights on rear
- (1) Rear flush mounted load light
- (1) Porch light above tack room door

Misc.

- 2-Color vinyl striping
- (2) Aluminum pop-up roof vents
- (3) Inside tie loops
- (4) Outside tie loops (2) each side
- Running boards both sides
- Spare wheel and tire, with cover
- Conspicuity tape and all required Federal & Canadian safety lighting

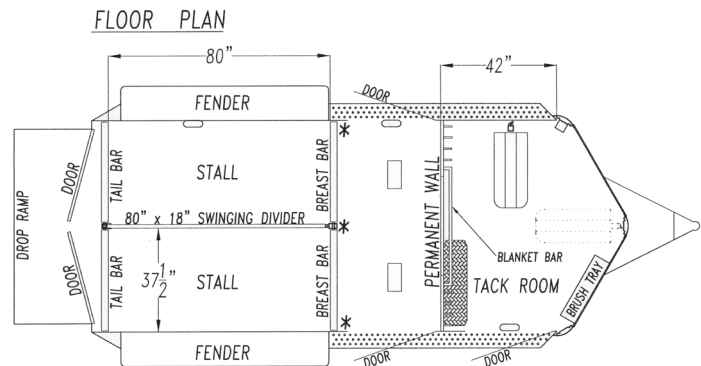

Bumper Pull Specifications

Length: 14' • Width: 6'8" • Height: 7'6"


With 42" front dressing room

Tapered nose with 24"x18" sliding window on each side

G.V.W.R.: 7,500 lbs.

Empty Weight: 3,140 lbs.

Tongue Weight: 500 lbs.

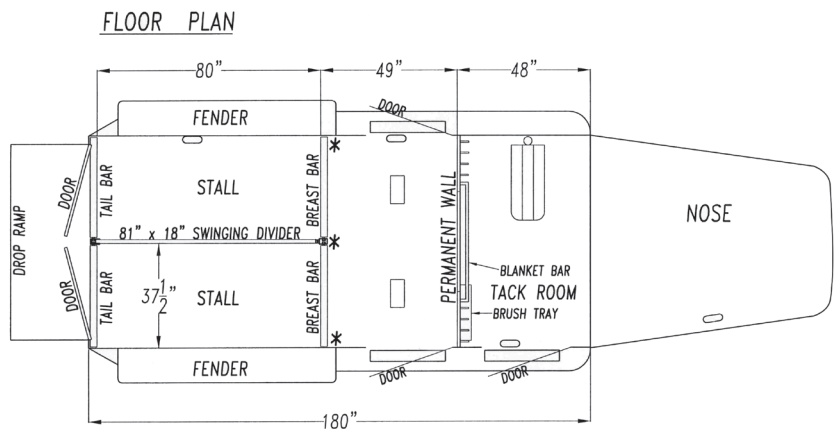

Gooseneck Specifications

Length: 15' • Width: 6'8" • Height: 7'6"

With 48" front dressing room

Tapered fuel saver nose with (1) 42"x15" sliding window on each side

G.V.W.R.: 7,500 lbs.

Empty Weight: 3,800 lbs.

Tongue Weight: 665 lbs.

Available Options

- Aluminum wheels
- 35"x15" sliding window between tack & horse area
- Sealed pass-thru door between tack & horse area
- 18" high diamond plate rock guard, bumper pull model
- Swinging head divider
- Vinyl feed bags with snaps
- 24"x24" drop down feed doors in lieu of sliding windows in doors
- Pre-wire for observation camera in horse area
- Equalizer elec/hyd landing gear with 12 volt deep cell battery, gooseneck model

For more information or the dealer nearest you, contact
sales@mheby.com
 M.H. Eby, Inc.
www.mheby.com • 800-292-4752